

Specification Sheet

CN201 SWEEPER

Series CN201 Euro 5


Sheet 1 of 1

Subject Technical Information & Data

Issue Number: A

Date: September 2011

Reference: ECN 707144

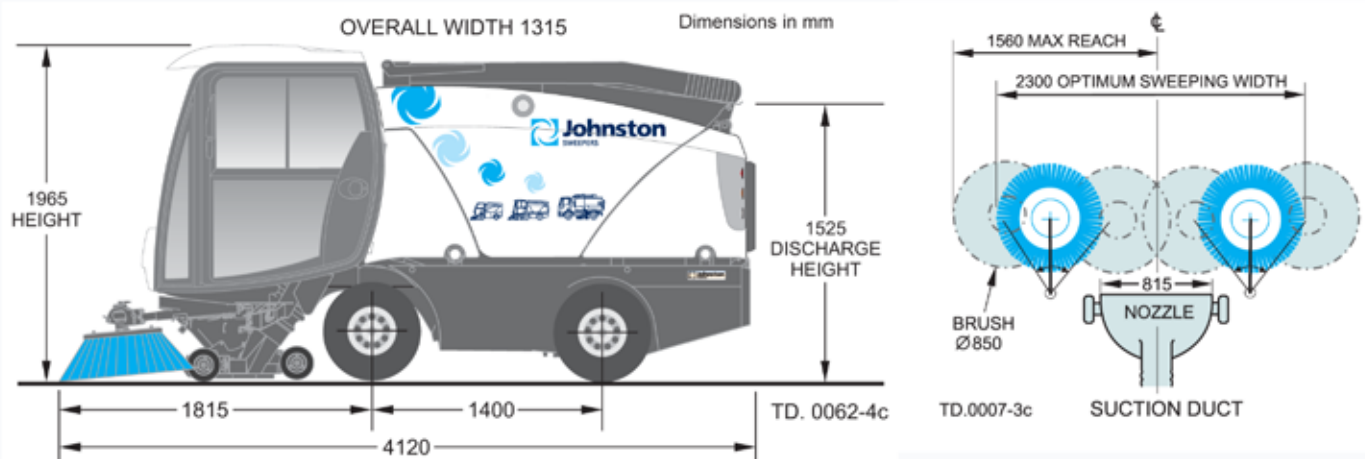

Data and Performance Information

Engine Option Euro 5	
Model	VM R754 EU5 05D/9 common rail direct injection turbocharged and intercooled diesel engine
Cubic capacity	2.970 litres
No. of cylinders	4
Gross rated power	62 kW (83 bhp) @ 2300 rev./min.
Maximum torque	270 Nm (199 lb.ft.) @ 1400 rev./min.
Legislation compliance	Meets Euro 5 emissions legislation Directive 2005/55/EC at last amended by directive 2008/74/EC.

Sweeping Equipment	
Brush diameter	850 mm
Brush speed	Variable up to 125 rev./min.
Nozzle width	815 mm
Hopper discharge height	1.525 m

Capacities	
Hopper voided volume	1.8 m ³ , 4003 stainless steel hopper
Payload capacity	1.5 m ³
Fuel tank	52 litres
Clean water tank	152 litres
Recirculation system	250 litres
Total water systems	402 litres

Performance	
Tare Weight	2700 kg.
GVM	4000 kg.
Payload	1300 kg. - Dependant on options
Maximum speed	Up to 40 km/h
Sweeping speed	0 to 16 km/h
Sweep rate/output	36,800 m ² /hr (theoretical max)
Gradeability forwards	Up to 30%
Sweeping operational rpm	1100 - 1480 rpm
Transit operational rpm	Up to 1750 rpm



Technical Specification

Transmission:

Full hydrostatic transmission with closed loop circuit and variable angle swash plate piston pump. Maximum transit speed up to 40 km/h. Sweeping speeds up to 16 km/h.

JET Engine Control:

Innovative Johnston microprocessor transmission control system providing full automotive drive in transit mode, forward / reverse selection with slower "tortoise" speed feature for sweeping applications with anti-stall software.

Electrics:

12 volt system with 105 amp alternator.

Glide Suspension Standard:

Four wheel coil spring suspension with gas over oil dampers and a front mounted anti-roll bar.

Steering:

Full hydraulic power steering.

Turning Circle 4350mm kerb to kerb.

Optional 4-wheel steering system.

Reduces the kerb to kerb turning circle to 3760mm.

Tyre Size:

Front: 6.50 R10 Radial tyres

Rear: 225/75 R10 Radial tyres

Wide profile tyres give low ground pressure.

Brakes:

Front: Servo assisted hydraulic drum brakes with dual circuits between front and rear for added braking security.

Rear: Hydraulic drum brakes with integral parking brake.

Noise:

In cab: Noise between 71-73 dB(A), depending on operating speed.

External: Maximum L_{WA} of 103 dB(A) measured in accordance with Directive 2000/14/EC.

Vibration:

The vector sum weighted root means square acceleration values ($a_{h,w}$) during recommended sweeping/washing activities do not exceed 2.5 m/s² for hand-arm vibration and 0.5 m/s² for whole body vibration.

Impeller:

High pressure centrifugal fan unit mounted to hopper roof provides powerful suction means for the pickup nozzle and duct conveying system. Driven by hydraulic motor with integral heavy duty support bearings. Dynamically balanced multivane low noise fan impeller with wear resistant blades.

Cab:

Heater: Recirculating and fresh air blend heater with adjustable vents plus Air Conditioning

Visibility: Fully glazed with tinted safety glass. Electrically heated "Quick-clear" windscreen. Single pantograph twin speed plus intermittent windscreen wiper and screen washer.

Seating: Fully adjustable air suspension cloth covered driver's seat with adjustable back support. Rigidly mounted passenger seat.

Controls: Ergonomically designed for driver comfort. Switches located according to function. Overhead console incorporating lighting switches, stereo radio/mp3 player 7 inch full-colour CANview screen. A rear console containing ignition switch, tipping controls, suction fan and water switches. Arm rest containing all sweeping related controls for brushes, engine speed, brush balance, cruise control etc., is ergonomically positioned near to the driver.

Standard machine features:

CANview Display System (7 inch full-colour): Alerts the driver in the event of a system problem, various data downloadable via USB.

Beacon: Standard rotating with knock down feature.

Independent brush control.

Stereo Radio MP3 Player c/w USB interface with 45 watt dual cone speakers.

Reverse Warning: Audible warning device with night silent override.

Self Steering Wheeled Nozzle: With non marking replaceable rubber tyres.

Supawash: High pressure washing hand lance and pump (9 litres @ 68 bar) c/w reel and 10m hose.

Leaf flap on nozzle for ingestion of leaves.

Options:

4-wheel steering system increasing manoeuvrability.

Autolube grease system.

CCTV reverse camera system.

Climate control.

Hydrant hose, standpipe & key.

Nozzle castor wheels.

Radio/CD upgrade.

Rear arrow board of 300 mm diameter.

Rear towing attachment.

Spare wheel & jack.

Sweep performance monitor - provides information on total distance travelled, distance travelled while sweeping and hours sweeping.

Third brush system allowing for second level sweeping or extended swept width.

Wanderhose: Roof mounted with 3.7 metre reach.